

EL356873254US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. 10432RR

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

Walter Bruce Galt, James Bartoszewicz, and Roy Sells

For: **METHOD AND APPARATUS FOR ADAPTIVE TIME-BASED CALL ROUTING
IN A COMMUNICATIONS SYSTEM**

Enclosed are also:

- ☒ 23 Pages of Specification including an Abstract
- ☒ 14 Pages of Claims
- ☒ 10 Sheet(s) of Drawings
- ☒ A Declaration and Power of Attorney
- ☒ Form PTO 1595 and assignment of the invention to Nortel Networks Corporation
- ☒ Checks in the amount of \$40.00 for recordation fee and \$2,494.00 for filing fee.

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$760)
Total Claims	60	-20 =	40	X	\$ 18	=	\$720.00
Independent Claims	16	-3 =	13	X	\$ 78	=	\$1,014.00
Multiple Dependent Claims	0			X	\$260	=	\$0
Total Filing Fee							= 2,494.00

- ☒ Check enclosed for \$2,494.00.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to Carstens, Yee & Cahoon, LLP, Deposit Account No. 50-0392 A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37CFR § 1.16.
- ☒ Any patent application processing fees under 37CFR § 1.17.

Respectfully,

Duke W. Yee
Duke W. Yee

Reg. No. 34,134

Carstens, Yee & Cahoon, LLP

P.O. Box 802334


Dallas, Texas 75380

Telephone: (972)367-2001

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" mailing label number EL356873254US. Date of deposit September 21, 1999. I hereby certify that the papers or fees listed below are being deposited with the United States Postal Service by "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Jennifer Mills



Signature

ENCLOSED are the following documents, being sent by "Express Mail":

- Transmittal Document (1 page) in duplicate;
- Specification and claims (37 pages), including 1 page Abstract;
- 10 sheet(s) of (informal) drawings, Figures 1-14;
- Declaration and Power of Attorney (3 pages);
- Recordation Form PTO-1595 (1 page);
- Assignment (2 pages);
- Checks in the amount of \$2,494.00 for filing fee, and \$40.00 for recordation fee; and
- Return postcard.

094044-094044

Docket No. 10432RR

**METHOD AND APPARATUS FOR ADAPTIVE TIME-BASED CALL
ROUTING IN A COMMUNICATIONS SYSTEM**

5

1. Field of the Invention:

The present invention relates generally to an improved communications system and in particular to a method and apparatus for routing calls in a communications system. Still more particularly, the present invention provides a
10 method and apparatus for routing calls to a subscriber who may be contacted at one of a number of phones.

2. Background of the Invention:

Intelligent network (IN) or advanced intelligent network (AIN) provide
15 mechanisms to create and support uniform telecommunications services. Intelligent network elements, tied together with signaling system no. 7 (SS7) or common channel signaling no. 7 (CCS7) provide an infrastructure to deliver a variety of new telecommunications services. Such signaling systems exchange transaction capabilities application part (TCAP) messages or queries between network elements
20 to invoke selected services and ISDN-user part (ISUP) messages between network node switching elements to set up and route calls. The TCAP and ISUP messages are handled by a data communications system separate from the trunks which carry the calls themselves. The elements of such intelligent telephone systems include service switching points (SSPs) interconnected by trunks for carrying calls, and signal
25 transfer points (STPs) and service control points (SCPs) connected to each other and the SSPs by SS7 data links for carrying signaling. A service control point (SCP) is an "intelligence center" with access to application databases enabling it to deliver various combinations of features, such as 1-800 number services and call redirection. A signal transfer point (STP) is a signaling hub or concentrator, typically connecting

09400141-092199

Docket No. 10432RR

several service switching points to an SCP. A service switching point (SSP) is a network node normally associated with central office switch equipped with signaling system number 7 (SS7) messaging links to permit communication with the SCPs and which has special IN call processing software including a plurality of "Point-in-Call triggers" which can be provisioned or set to interrupt call processing momentarily and initiate a TCAP query to the SCP for instructions on how to complete the call processing. Based upon the instructions, the originating end office seizes a trunk to a neighboring switch and creates an initial address message which it sends to the neighboring switch via the signaling network. The initial address message includes various parameters which will control routing of the call to its destination.

Some services provided by AIN include, for example, intelligent caller data, disaster routing, call screening, automatic callback, and intelligent call redirection. Intelligent call redirection involves assigning a number to a subscriber by which callers may contact the subscriber at different locations or telephones. In this case, a telephone number is assigned to a specific person rather than to a physical telephone. When a call is made to a subscriber's telephone number, the call is routed to a telephone at one of a number of locations. If the user cannot be located at one of the locations, the call may be routed to a voice messaging system. Further, the call also may be routed to a cellular telephone or a pager. The primary difficulty in effectively implementing personal telephone numbers involves accurately determining to which physical telephone instrument to forward calls.

One approach in locating a subscriber follows a "find me" approach which typically forwards calls to a personal telephone number to different telephones according to a preset sequence until the subscriber is located. This approach involves defining the potential location of a subscriber and routing the calls to a telephone where the subscriber may be found at a particular time. One problem with this mechanism is that a subscriber may not keep a rigid schedule resulting in delays in finding the subscriber. These delays are caused because the caller must wait while

Docket No. 10432RR

the system rings each telephone number in the sequence three or four times before proceeding to the next telephone number if the subscriber does not answer the currently called telephone number.

Another approach involves a "follow me" approach, which forwards calls to a personal telephone number according to recent activity of the subscriber. This activity includes the subscriber engaging in credit card calls, credit card transactions, or automated teller transactions indicating the location of the subscriber. When such an activity is performed, the location of the individual, potentially including the telephone number, is recorded in a database that tracks the location of the subscriber. Calls can then be forwarded to the specific telephone number associated with the last known location of the subscriber, or to the telephone number in the subscriber's defined list of calls that is nearest to the last known location as indicated by the area code, cellular region, paging area, etc.

One problem with this approach is that it provides a forwarding location for calls to a personal telephone number that may be available for only a limited time. The new number is valid only as long as the subscriber stays at the location where he performed that activity.

Therefore, it would be advantageous to have an improved method and apparatus for locating and calling a subscriber having a telephone number that is routable to a number of different locations.

Docket No. 10432RR

SUMMARY OF THE INVENTION

The present invention provides an improved method and apparatus for routing a call to a subscriber who may be reached at a number of different locations. The present invention includes a mechanism that is function based rather than time based for locating a subscriber at different locations. The function may be, for example, "at home" or "going to work". More specifically, a method in a communications system for routing a call includes receiving a call request to a subscriber and identifying call routing information for the subscriber. In order to identify call routing information for the subscriber, a determination is made as to whether function based routing has been selected. If so, the call may be routed using a sequence of destinations associated with the function. If function based selection is not active, then the call is routed using a scheduled based on time.

The present invention also allows for automatically changing and extending routing information. The changes may be based on successful call completions to different destinations. These changes are made both for the call routing schedule and the function. An interface is provided to the user to select the type of call location mechanism, call routing schedule or function. The interface may be, for example, be provided over the Internet or through a telephone device.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

Docket No. 10432RR

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use,
5 further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

Figure 1 is a block diagram of a communications system depicted in accordance with a preferred embodiment of the present invention;

10 **Figure 2** is a block diagram of a service control point (SCP) depicted in accordance with a preferred embodiment of the present invention;

Figure 3 is a block diagram illustrating a data processing system in which the present invention may be implemented;

15 **Figure 4** is an illustration of an interface used to view and select routing sequences depicted in accordance with a preferred embodiment of the present invention;

Figure 5 is an illustration of a GUI used to set up and modify a routing schedule and functions in accordance with a preferred embodiment of the present invention;

20 **Figure 6** is an illustration of a GUI in which a subscriber may change call routing of calls to the subscriber accordance with a preferred embodiment of the present invention;

Figure 7 is a flowchart for a process displaying a call routing schedule and functions accordance with a preferred embodiment of the present invention;

25 **Figure 8** is a flowchart of a process for modifying and adding functions depicted in accordance with a preferred embodiment of the present invention;

Figure 9 is a flowchart of a process for routing calls in accordance with a preferred embodiment of the present invention;

09400344-09400344

Docket No. 10432RR

Figure 10 is a flowchart of a process for routing calls in accordance with a preferred embodiment of the present invention;

Figure 11 is a flowchart of a process for routing a call to a subscriber using a call routing schedule in accordance with a preferred embodiment of the present invention;

Figure 12 is a flowchart for routing calls using a subscriber selected function in accordance with a preferred embodiment of the present invention;

Figure 13 is a flowchart of a process for making long term changes to a routing schedule in accordance with a preferred embodiment of the present invention;

and

Figure 14 is a flowchart for adapting a call routing schedule using subscriber initiated activity in accordance with a preferred embodiment of the present invention.

0940044 034607400460

Docket No. 10432RR

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference now to the figures and in particular with reference now to **Figure 1**, a block diagram of a communications system is depicted in accordance with a preferred embodiment of the present invention. Communications system **100** is an example of a communications system in which the processes and apparatus of the present invention may be implemented to provide a more user friendly and more efficient mechanisms for routing calls to a subscriber who may be contacted at one of a number of telephones or other communication devices based on their current activity schedule.

Communications system **100** includes service switching points (SSPs) **102-112** interconnected by T1 trunks **114-122**. A SSP is a local exchange in a telephone network. A SSP may be a combination of a voice switch and SS7 switch or an adjunct computer connected to the voice switch of a local exchange. Each switch includes a switch fabric with input and output ports used to route a call to a destination. The SSP provides the functionality of communicating with the voice switch via the use of primitives in creating packets, or signal units, needed for transmission in a SS7 network. In routing calls, a SSP will send requests or queries to a database to determine where to route a call. The SSP will use the information provided by the call party, such as dialed digits, to determine how to connect the call. In this example, SSP **112** is a tandem access SSP, which is employed to provide access between networks within communications system **100**, such as providing a connection between two local exchange carriers (LECs) within communications system **100**. For example, SSP **102-106** may be located in one LEC while SSPs **108-110** may be located in another LEC. SSPs **102-106** are connected to signaling transfer (STP) **124** by signaling links **126-130** while SSPs **108-110** are connected to STP **132** by signaling links **134** and **136**.

Docket No. 10432RR

All SS7 packets travel from one SSP to another through the services of a STP. The STP serves as a router in the SS7 network. The STP also is typically adjunct to a voice switch. Also found in communications system 100 are service control points (SCPs) 138 and 140. SCP 138 is connected to STP 124 by signaling link 142 while
5 SCP 140 is connected to STP 132 by signaling link 144. A SCP serves as an interface to various databases, which may contain information about subscriber services, routing of special service numbers, calling card validation and fraud protection, and AIN services. The SCP is usually a computer used as a front end to a computer database.

10 Each SSP may communication with a SCP, such as SCP 138 or 140 using TCAP messages to ascertain a particular call. A SCP may communicate with other SCPs by means of ISDN user part initial address messages (ISUP-IAM) to set up trunk connections for calls.

Further, communications system 100 includes a cellular network 146 which
15 has a connection to SSP 138 through T1 line 148. Signaling and routing information may be sent between STP 124 and cellular network 136 through signaling line 150. Telephone devices, such as telephones 152-164 are connected to SSPs 102-106 and SSPs 108 and 110 in communications system 100. Through this network, a user at one telephone may call a user at another telephone or a user at a mobile station, such
20 as mobile station 166 in cellular network 146. Additionally, communications system 100 may include Internet 168, which provides a mechanism for a subscriber to access subscriber information stored in a SCP 138. Communications system 100 may exclude shown components and/or include other components not shown in the depicted example. The illustration in **Figure 1** is not meant to imply architectural
25 limitations on the present invention.

The present invention provides a method, apparatus, and instructions for using information from successful call attempts to modify the call sequences in order to favor call set up to the location that is identified as having previously answered calls

0940044-09249
56260-4400460

Docket No. 10432RR

during a specific time period. For example, a subscriber may be located at different locations or telephones depending on the time of the day and the day of the week. The calling sequence may identify different numbers at which the subscriber may be contacted. Furthermore, if the subscriber uses the service as a full personal agent
5 environment to which they place calls then the system notes the last used caller line identification (CLI) of the subscriber and uses that as a potential contact location.

The mechanism of the present invention also allows a subscriber to setup the sequence of numbers to call the subscriber based on functions or activities of the subscriber. These functions may be, for example, in the car, at work, at home,
10 golfing, or at the gym in which the function is associated with a particular number or list of numbers. A mechanism in the form of a graphical user interface (GUI) is provided to allow a subscriber to setup and change the sequence of numbers used to reach the subscriber. This sequence of numbers is also referred to as a routing list or call routing schedule. The function may be setup using time slots or activated by the
15 subscriber through the GUI or a series of digits using a phone menu system. The activated function may stay activated until cancelled or until after a selected period of time. When such a function is not active, the time based routing mechanism is used.

With reference now to **Figure 2**, a block diagram of a service control point (SCP) is depicted in accordance with a preferred embodiment of the present
20 invention. The process of the present invention may be implemented within SCP **200**.

SCP **200** is an example of a SCP in which the process of the present invention may be implemented. SCP **200** includes a bus **202** interconnecting a processing unit **204**, memory **206**, input/output (I/O) unit **208**, I/O unit **210**, and storage device **212**.
25 Storage device **212** includes a number of databases, such as, for example, line number portability (LNP) **214**, call management services database (CMSDB) **216**, and call routing database **218**. Calls to a subscriber may be received from a STP through I/O

667660 " F400450

Docket No. 10432RR

unit **208**. In addition, SCP **200** may access other databases located remotely from SCP **200** through I/O unit **210**. For example, a business services database (BSDB) is used to allow subscribers to store call processing instructions, network management procedures, and other data relevant to a private network of the subscriber. Such a database is not located within SCP **200**, but may be accessed through I/O unit **210**.

In the depicted example, information relating to routing lists or sequences of numbers used to call a subscriber may be stored within call routing database **218**. The instructions for executing the processes of the present invention may be stored within memory **206** and executed by processing unit **204**.

With reference now to **Figure 3**, a block diagram illustrates a data processing system in which the present invention may be implemented. Data processing system **300** is an example of a computer at which a subscriber may set, modify, and activate various call routing functions of the present invention. Data processing system **300** employs a peripheral component interconnect (PCI) local bus architecture. Although the depicted example employs a PCI bus, other bus architectures such as Micro Channel and ISA may be used. Processor **302** and main memory **304** are connected to PCI local bus **306** through PCI bridge **308**. PCI bridge **308** also may include an integrated memory controller and cache memory for processor **302**. Additional connections to PCI local bus **306** may be made through direct component interconnection or through add-in boards. In the depicted example, local area network (LAN) adapter **310**, SCSI host bus adapter **312**, and expansion bus interface **314** are connected to PCI local bus **306** by direct component connection. In contrast, audio adapter **316**, graphics adapter **318**, and audio/video adapter **319** are connected to PCI local bus **306** by add-in boards inserted into expansion slots. Expansion bus interface **314** provides a connection for a keyboard and mouse adapter **320**, modem **322**, and additional memory **324**. SCSI host bus adapter **312** provides a connection for hard disk drive **326**, tape drive **328**, and CD-ROM drive **330**. Typical PCI local bus implementations will support three or four PCI expansion slots or add-in connectors.

Docket No. 10432RR

An operating system runs on processor **302** and is used to coordinate and provide control of various components within data processing system **300** in **Figure 3**. The operating system may be a commercially available operating system such as OS/2, which is available from International Business Machines Corporation. “OS/2” is a
5 trademark of International Business Machines Corporation.

Those of ordinary skill in the art will appreciate that the hardware in **Figure 3** may vary depending on the implementation. Other internal hardware or peripheral devices, such as flash ROM (or equivalent nonvolatile memory) or optical disk drives and the like, may be used in addition to or in place of the hardware depicted in **Figure**
10 **3**. Also, the processes of the present invention may be applied to a multiprocessor data processing system.

For example, data processing system **300**, if optionally configured as a network computer, may not include SCSI host bus adapter **312**, hard disk drive **326**, tape drive **328**, and CD-ROM **330**, as noted by dotted line **332** in **Figure 3** denoting optional inclusion. In that case, the computer, to be properly called a client computer, must include some type of network communication interface, such as LAN adapter
15 **310**, modem **322**, or the like. As a further example, data processing system **300** may be a Personal Digital Assistant (PDA) device which is configured with ROM and/or flash ROM in order to provide non-volatile memory for storing operating system files and/or user-generated data. Additionally, data processing system **300** may be a smart
20 phone containing a processor and instructions used to set up and modify routing schedules and to turn on and turn off routing functions. Data processing system **300** may make these changes through a graphical user interface and a communications link to communications system **100** in **Figure 1**. For example, a browser program,
25 such as, for example, Netscape Communicator from Netscape Communications Corporation, may be used by a subscriber to access and modify subscriber information for routing calls.

Docket No. 10432RR

The depicted example in **Figure 3** and above-described examples are not meant to imply architectural limitations. For example, data processing system **300** also may be a notebook computer or hand held computer in addition to taking the form of a PDA. Data processing system **300** also may be a kiosk or a Web appliance.

5 **Figures 4-6** illustrate graphical user interfaces (GUIs) that may be employed to allow a subscriber to set up and modify call routing information. The GUIs in these examples are windows displayed in a data processing system. The actual presentation may take different forms depending on the implementation. For example, the windows may be those for a browser that display pages received from a
10 device or node, such as a SCP on the communications system. In such a case, the subscriber accesses the subscriber's routing information through the World Wide Web on the Internet via a TCP/IP connection. These GUIs are examples of an interface that may be used by a subscriber or other user to route calls based on a function or based on a call routing schedule that is time based. Interaction with the
15 GUI causes messages or calls to be sent to the communications system to activate and deactivate different calling sequences depending on whether a function or call routing schedule is selected by the subscriber. In this manner an intuitive interface is provided to a subscriber to easily change the routing of calls to the subscriber.

With reference now to **Figure 4**, an illustration of an interface used to view
20 and select routing sequences is depicted in accordance with a preferred embodiment of the present invention. GUI **400** provides an interface on a data processing system, such as, for example, data processing system **300** in **Figure 3**, to view and initiate call routing functions. The data processing system may take many forms, such as, for example, a personal computer, a personal digital assistant, or a digital wireless phone.
25 The information viewed by the subscriber may be received by the data processing system over a communications link established to a SCP. Messages or request may be sent back to the SCP over the same link.

Docket No. 10432RR

GUI **400** includes a window **402** containing a call routing schedule **404** and a function schedule **406**. In the depicted example, call routing schedule **404** is a time-based schedule and shows that the subscriber is in the car between 8:00 a.m. and 8:30 a.m.. From 8:30 a.m. to 12:00 p.m. the subscriber may be contacted at work. From 12:00 p.m. to 1:00 p.m. the subscriber is at the gym as shown in call routing schedule **404**. Additional times and locations are not shown, but may be viewed by manipulating scroll bar **408**. Changes to the schedule displayed in call routing schedule **404** may be made by selecting change button **410**. Additionally in window **402**, function list includes selectable functions that may be activated by selecting “on” button **412**. A selected function may be deactivated by selecting “off” button **414**. In the depicted example, the functions include, “in car”, “at work”, “at home”, and “at gym”. By selecting a function and turning the function “on”, call routing schedule **404** may be overridden such that calls are routed to the selected function.

With reference next to **Figure 5**, an illustration of a GUI used to set up and modify a routing schedule and functions is depicted in accordance with a preferred embodiment of the present invention. GUI **500** contains a window **502** that is displayed in response to a selection of change button **410** in **Figure 4**. Window **502** is used by a subscriber to change the call routing schedule.

Window **502** includes a function list **504** in which a number of different locations may be selected for use in calling the subscriber. Function list **504** is a list of functions that have been set up for the subscriber. In this example, “in car”, “at work”, “at gym”, “at home”, and “golfing” are the functions that have been set up for the subscriber. Selection of add button **506** will allow a user to add a new function in field **508**. A time period for the function may be set in field **510**. A time period allows for the user to set a length of time during which the function will be active and used in place of the call routing schedule, which is a time-based call routing schedule. After the time period has elapsed, the function will deactivate and calls made to the subscriber will be processed using the routing schedule. Additionally, the user may

Docket No. 10432RR

enter a start time in field **512** and an end time in field **514** during which a particular number associated with the function will be used to reach the subscriber. These two times are used to define a time slot. One or more numbers may be entered into fields **516**, **518**, and **520** for the particular function. These numbers are also referred to as
5 directory numbers. Numbers may be entered into additional fields not shown. These fields may be shown by manipulating controls **522** and **524**. The numbers entered in these fields have a priority used to call the subscriber. In this example, field **516** has the highest priority, field **518** has the next highest priority, and field **520** has the lowest priority. As a result, the number entered in field **516** will be called first when
10 attempting to call the subscriber for the particular function. The number in field **518** will be called next if the subscriber cannot be reached at the number entered into field **516**. “Delete” button **526** may be used to delete an entire function in function list **504**. “Ok” button **520** is used to accept changes made by the subscriber. Selection of “Ok” button **520** causes any changes to be stored for use in routing calls for the
15 subscriber. “Cancel” button **530** is used to cancel or prevent any changes entered by the subscriber from being stored or used to route calls.

Turning next to **Figure 6**, an illustration of a GUI in which a subscriber may change call routing of calls to the subscriber is depicted in accordance with a preferred embodiment of the present invention. GUI **600** includes a window **602** in
20 which a subscriber may select different routing options for calls made to the subscriber. In this example, schedule **604** is an icon or image that is selectable by the subscriber to initiate routing of calls based on a call routing schedule, which is time-based. Window **602** also displays “at home” **606**, “at work” **608**, “in car” **610**, “golfing” **612**, which are icons or images selectable by the subscriber to initiate call
25 routing associated with a function with which the subscriber is familiar. Selection of one of these icons or images results in a request being sent to a SCP to use the destinations set up for the particular function to route calls to the subscriber. In the depicted examples, these destinations are represented by telephone numbers or other

Docket No. 10432RR

call routing information in a database used to route calls between a caller and a call party. If schedule **604** had been previously selected by the subscriber, a selection of one of the function icons or images will result in the calling sequence associated with selected icon or image being used in place of the call routing schedule. This

5 replacement or change in call routing may remain in effect until a different function is selected or until the icon or image for the call routing schedule, schedule **604**, is selected. Optionally, time period may be set for a function during which the calling sequence associated with the function will be used to route calls. When the time period expires, the routing will return to the call routing schedule or some other

10 default function.

Figures 7-14 illustrate flowcharts of processes used in routing calls to a subscriber in which a call received for the subscriber may be routed to a number of destinations. With reference now to **Figure 7**, a flowchart for a process displaying a call routing schedule and functions is depicted in accordance with a preferred

15 embodiment of the present invention. The flowchart in **Figure 7** is employed to process input to the graphical user interface illustrated in **Figure 4**. The process begins by displaying a window containing a call routing schedule and functions for a subscriber (step **700**). This window may be window **402**, as illustrated in **Figure 4**. Thereafter, the process waits to receive user input (step **702**). Upon receiving a user

20 input that selects a function in the GUI, the selected function is highlighted (step **704**) with the process then returning to step **702** to wait for additional user input. If the user input received is a selection of the “on” button, the selected function is activated (step **706**) with the process returning to step **702**. Activating the function using the “on” button results in calls to the subscriber being directed towards one or more

25 numbers in an ordered list associated with the function. For example, if the function is “in car”, a call to the subscriber is routed first to the users mobile number. If no answer is received at the users mobile number, then the call is routed to the user’s work number. If no answer is received at the work number, the call may be routed to

Docket No. 10432RR

a voice mailbox for the user. The sequence of call routing is used in place of any sequence of numbers valid for the time in which the call was made. This function will continue until turned off. Alternatively, a time period may be set in which the function will take president over a time-based routing schedule. When the time
5 period is expired, the time function will deactivate and the time-based routing schedule will again be used to route calls to the subscriber.

Selection of the “off” button as a user input results in the function being deactivated (step **708**) with the process then returning to step **702**. The deactivation of the function results in routing the calls using the time-based call routing schedule.
10 Selection of the modify button results in a display of a modification window (step **710**) with the process terminating thereafter. In the depicted examples, the modification window is window **502** in **Figure 5**.

Turning now to **Figure 8**, a flowchart of a process for modifying and adding functions is depicted in accordance with a preferred embodiment of the present
15 invention. The process begins by displaying a list of functions for the subscriber (step **800**). This display is in the form of a window, such as window **502** in **Figure 5**. Thereafter, the process waits for user input (step **802**). Upon receiving selection of a function, the selected function is then highlighted (step **804**) with the process then returning to step **802** to wait for additional user input. Upon receiving selection of the
20 delete button as an input, the selected function will be deleted from the list of functions (step **806**) with the process then returning to step **802**. Upon receiving user input to add a function, the process receives the function name (step **808**). The function named received is entered in a field in the window. Thereafter, one or more phone numbers may be entered by the subscriber (step **810**). These phone numbers
25 may be placed in an order in which calls are to be routed to the subscriber. A time slot is entered (step **812**). Entry of the time slot may be made by entering a start and stop time for the function. Additionally, a time period may be entered for the function (step **814**) with the process then returning to step **802**.

Docket No. 10432RR

Upon receiving selection of okay button as an input, entries made in the fields for the function will be stored (step **816**) with the process terminating thereafter. Receiving selection of the cancel button will result in the process terminating without saving any changes.

5 In **Figure 9**, a flowchart of a process for routing calls is depicted in accordance with a preferred embodiment of the present invention. This process is initiated when a subscriber requests a change in call routing options. In the depicted example, the request is made over the Internet using a TCP/IP connection. The process begins by identifying the subscriber making the request (step **900**).

10 Subscriber information is obtained from a database of subscribers, such as call routing database **218** in **Figure 2** (step **902**). The information includes information needed to display various routing options for the subscriber. A page or display is created using the subscriber information (step **904**), and the page is sent to the subscriber (step **906**). The page is similar to GUI **700** in **Figure 7**.

15 The process then receives user input (step **908**). A determination is made as to whether the user input is one initiating a function (step **910**). If the user input initiates a function for call routing, then the routing of the calls to the subscriber is switched to use a group of destinations to find for the selected function (step **912**). Thereafter, a determination is made as to whether a time period has been set for this
20 function (step **914**). If a time period has been set or defined, a timer is set to indicate when the routing of calls should be switched back to the call routing schedule (step **916**) with the process then returning to step **908**. Otherwise, the process proceeds directly back to step **908**. In step **916**, the routing of calls may be switched back to some other group of destinations instead of those defined by the call routing schedule.
25 For example, the routing of calls may be switched to some default function or the subscriber may be queried for another selection.

With reference again to step **910**, if the user input is not a function initiation, a determination is made as to whether the user input initiates the call routing schedule

0940044-092499
66 FEB 07 14:00:46

Docket No. 10432RR

(step **918**). If the call routing schedule is to be initiated, the routing of calls for the subscriber is switched to a set of destinations defined in the call routing schedule (step **920**) with the process then returning to step **908**. Otherwise, a determination is made as to whether the subscriber has exited the process (step **922**). If the subscriber
5 has exited the process terminates. Otherwise, the process returns to step **908**.

Turning next to **Figure 10**, a flowchart of a process for routing calls is depicted in accordance with a preferred embodiment of the present invention. The process begins by receiving a call from a caller to a subscriber (step **1000**). The subscriber is then identified (step **1002**). Subscriber information is retrieved for the
10 identified subscriber (step **1004**). A determination is then made as to whether routing is to be performed by a function selected by the subscriber (step **1006**). If routing is to be made using a function, a determination is made as to whether a timer has expired for the selected function (step **1008**). If the timer has not expired, then routing of the call is initiated using the selected function (step **1010**) with the process
15 terminating thereafter.

With reference again to step **1008**, if the timer has expired, the process then switches to the call routing schedule (step **1012**). Call routing is then initiated using the call routing schedule (step **1014**) with the process terminating thereafter.

With reference again to step **1006**, if routing is not to be made using a
20 function, then process proceeds directly to step **1014** as described above.

With reference now to **Figure 11**, a flowchart of a process for routing a call to a subscriber using a call routing schedule is depicted in accordance with a preferred embodiment of the present invention. The process begins by identifying in the call routing schedule, the current time slot that is to be used to route the call (step **1100**).
25 The main destination for the time slot is called (step **1102**). The main destination in this example is the first number or the number having the highest priority that is associated with the time slot. Thereafter, a determination is made as to whether the call has been completed (step **1104**). This determination is made by seeing whether

05400141.092199
66220774660

the subscriber has answered the phone within a selected period of time. If the call has not been completed, A determination is then made as to whether there are uncalled alternate destinations present for the time slot (step **1106**). If alternate destinations that have been uncalled are present, the next alternate destination is identified for the time slot and called (step **1108**). Destinations for the time slot are placed in an order in which calls should be made to the subscriber. A determination is made as to whether the call has been completed (step **1110**). If the call has not been completed, the process returns to step **1106**.

With reference again to step **1106**, if uncalled alternated destinations are not present for the time slot, a determination is made as to whether another time slot is present (step **1118**). If another time slot is present, the next time slot in the sequence is selected (step **1120**) with the process then returning to step **1102**. If additional time slots are not present, a default action is performed (step **1122**) with the process terminating thereafter. This default action may take various forms. For example, the caller may be given a message that the subscriber is unavailable. Alternatively, the caller may be sent to a voice mail box for the subscriber. With reference again to step

Docket No. 10432RR

1104, if the call is completed, the process terminates, as does step **1114** if the threshold is less than the counter.

In **Figure 12**, a flowchart for routing calls using a subscriber selected function is depicted in accordance with a preferred embodiment of the present invention. The process begins by calling a main destination from a group of destinations associated with the selected function (step **1200**). A determination is made as to whether the call was completed (step **1202**). If the call was not completed, a determination is made as to whether uncalled alternate destinations are present (step **1204**). If uncalled alternate destinations are present, the next destination is selected (step **1206**). The group of destinations for the group of functions are placed in an order in which calls should be attempted. The selected destination is then called (step **1208**). A determination is made as to whether the call to the alternate destination was completed (step **1210**). If the call was not completed, the process returns to step **1204**. Otherwise, the process then increments a counter for the destination (step **1212**).

Next, a determination is made as to whether the counter is greater than a threshold value (step **1214**). The counter counts the number of successful connections to the destination. This counter is used to determine the likelihood of this destination being the preferred destination for this time period/function. If the counter is greater than a threshold value, the alternate destination is then set as the first alternate destination (step **1216**) with the process terminating thereafter. In the depicted examples, this change in step **1216** is temporary and good for a single day or 24-hour period. With reference again to step **1214**, if the counter is not greater than the threshold, the process also terminates.

With reference again to step **1204**, if uncalled alternate destinations are not present, then a default action is performed (step **1218**) with the process terminating thereafter. This default action may be, for example, a message indicating the unavailability of the subscriber or sending the caller to a voice mail box for the

Docket No. 10432RR

subscriber. With reference again to step **1202**, if the call to the main destination is completed, the process terminates.

With reference now to **Figure 13**, a flowchart of a process for making long term changes to a routing schedule is depicted in accordance with a preferred embodiment of the present invention. The process begins by retrieving a routing schedule for the subscriber (step **1300**). Next, a subscriber call history is retrieved (step **1302**). The time period for this history may vary depending on the implementation. For example, the history may be a one week period or a one month period. The process selects a time slot from the routing schedule for processing (step **1304**). The destination having the most successful call completions is identified (step **1306**). A determination is then made as to whether this destination is a first alternate destination (step **1308**). If the destination is the first alternate destination, the destination is then set as the main destination for the time slot (step **1310**). A determination is then made as to whether more unprocessed time slots are present (step **1314**). If additional unprocessed time slots are present, the process returns to step **1304**. Otherwise, the process terminates.

With reference again to step **1308**, if the destination is not a first alternate destination, a determination is made as to whether the destination is the main destination (step **1312**). If the destination is not the main destination, then the destination is set as the first alternate destination (step **1316**) with the process then proceeding to step **1314** as described above. If the destination is the main destination, the process proceeds directly to step **1314**.

With reference now to **Figure 14**, a flowchart for adapting a call routing schedule using subscriber initiated activity is depicted in accordance with a preferred embodiment of the present invention. The process begins by detecting a subscriber initiated call (step **1400**). Thereafter, the calling line identifier (CLI) is obtained for the call (step **1402**). The CLI is then stored as the first alternate destination (step **1404**) with the process terminating thereafter.

Docket No. 10432RR

The processes described above in the flowcharts are used in a SCP in the depicted examples, but may be employed elsewhere depending on the implementation. For example, some of the steps may be implemented at a data processing system used by a subscriber.

5 Those of ordinary skill in the art will appreciate that the processes of the present invention are capable of being distributed in the form of a computer readable medium of instructions and a variety of forms for use in a communications system. Further, the present invention applies equally regardless of the particular type of signal bearing media actually used to carry out the distribution. Examples of
10 computer readable media include recordable-type media such a floppy disc, a hard disk drive, a RAM, and CD-ROMs and transmission-type media such as digital and analog communications links.

The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the
15 invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. For example, although the depicted example provides an interface through the Internet, other interfaces may be used to select and modify routing schemes. For example, the interface may be a voice response system using voice recognition which may be employed to set up, modify, and select routing
20 mechanisms. Additionally, call routing schemes or numbers used may be sent to the user via billing records. In this manner, a subscriber may see changes to the order in which destinations are called. The embodiment was chosen and described in order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments
25 with various modifications as are suited to the particular use contemplated.

0940044-09249
667260-74700460

Docket No. 10432RR

1 **CLAIMS:**

2 What is claimed is:

1 1. A method in a communications system for routing a call, the method
2 comprising:
3 receiving a call;
4 identifying call routing information for the call;
5 responsive to identifying call routing information, determining whether a
6 function has been selected for routing the call; and
7 responsive to a determination that a function has been selected for routing the
8 call, routing the call using a sequence of destinations associated with the function.

1 2. The method of claim 1 further comprising:
2 responsive to identifying call routing information, determining whether a call
3 routing schedule based on time has been selected for routing the call; and
4 responsive to a determination that a call routing schedule based on time is to
5 be used, routing the call using a call routing schedule based on time.

1 3. The method of claim 1, further comprising:
2 responsive to a determination that a function has been selected for routing the
3 call, determining whether a time period for the function has expired;
4 responsive to a determination that a time period for the function has expired,
5 routing the call; and
6 routing the call using a call routing schedule based on time instead of using
7 the sequence of destinations associated with the function.

1 4. The method of claim 1 further comprising:

0940044-0349
65 FEB 07 4:00 PM '09

Docket No. 10432RR

2 monitoring results from routing of the call; and
3 automatically modifying the call routing information based on the results to
4 form modified call routing information, wherein subsequent calls are routed using the
5 modified call routing information.

1 5. The method of claim 1, wherein the call is routed to a subscriber associated
2 with the function.

1 6. The method of claim 2 further comprising:
2 monitoring results from routing of the call to the subscriber; and
3 automatically modifying the call routing information based on the results to
4 form modified call routing information, wherein subsequent calls are routed using the
5 modified call routing information.

1 7. A method in a communications system for call routing a call, the method
2 comprising:
3 receiving a call to a subscriber;
4 routing the call to the subscriber using a sequence of destinations associated
5 with the subscriber; and
6 responsive to a success of routing the call to the subscriber to a destination
7 within the sequence of destinations, automatically modifying the sequence of
8 destinations used to call the subscriber, wherein the sequence of destinations is
9 modified to favor destinations with successful call completions.

10

11 8. The method of claim 7, wherein the sequence of destinations is modified to
12 favor destinations with a selected level of call completions.

1 9. The method of claim 7 further comprising:

661250-1410460

Docket No. 10432RR

- 2 responsive to detecting initiation of a call by the subscriber from an origin
3 absent from the sequence of destinations, modifying the sequence of destinations to
4 include the origin as a destination within the sequence of destinations.
- 1 10. The method of claim 8, wherein the origin is included as a destination within
2 the sequence of destinations for a period of time.
- 1 11. The method of claim 8, wherein the calling line identifier is recorded to
2 identify the origin from which the subscriber initiated the call.
- 1 12. The method of claim 7, wherein the sequence of destinations are associated
2 with a time slot.
- 1 13. The method of claim 7, wherein the sequence of destinations are associated
2 with a function.
- 1 14. A method in a communications system for call routing a call, the method
2 comprising:
3 receiving a call to a subscriber;
4 routing the call using call routing information associated with the subscriber;
5 monitoring results from routing of the call to the subscriber; and
6 automatically modifying the call routing information based on the results to
7 form modified call routing information, wherein subsequent calls are routed using the
8 modified call routing information.
- 1 15. The method of claim 14, wherein the step of routing the call comprises:
2 routing the call to a main destination; and

09400441-092159
657269-7700460

Docket No. 10432RR

3 responsive to an absence of an answer at the main destination, routing the call
4 to an alternate destination.

1 16. A method in a communications system for call routing a call, the method
2 comprising:

3 receiving a call to a subscriber;

4 identifying a time of the call;

5 routing the call to the first destination in an ordered set of destinations for the
6 subscriber based on the time of the call;

7 responsive to an absence of an answer of the call at the first destination,

8 routing the call to a second destination in the ordered set of destinations;

9 responsive to an absence of an answer of the call at the second destination,

10 routing the call to a third destination in the ordered set of destinations; and

11 responsive to an answer of the call at the third destination for a number of
12 times, selecting the third alternate destination as the first alternate destination.

1 17. The method of claim 16, wherein the second alternate destination is selected
2 as the first alternate destination for a temporary period of time.

1 18. The method of claim 17, wherein the temporary period of time is a day.

1 19. The method of claim 16 further comprising:

2 responsive to the third destination being answered over a period of time,

3 setting the third destination as the second destination.

1 20. The method of claim 16 further comprising:

2 responsive to the second destination being answered over a period of time,

3 setting the second destination as the first destination.

0940044-09249
667260-7700460

Docket No. 10432RR

1 21. A method in a graphical user interface for use in routing calls in a
2 communications system, the method comprising the computer implemented steps of:
3 displaying a set of icons, wherein each icon within the set of icons is
4 associated with a function used to route calls to a party; and
5 responsive to a selection of an icon within the set of icons, sending a message
6 to the communications system to route calls to the party using a calling sequence
7 associated with the function.

1 22. The method of claim 21 further comprising:
2 displaying a scheduling icon; and
3 responsive to a selection of the scheduling icon, sending a message to the
4 communications system to route calls to the party using a time based calling schedule.

1 23. The method of claim 22, wherein the selection of an icon from the set of icons
2 overrides any previous selection of an icon from the set of icons.

1 24. The method of claim 23, wherein the selection of the icon overrides a previous
2 selection of the scheduling icon.

1 25. The method of claim 21, wherein the data processing system is a personal
2 computer.

1 26. The method of claim 21, wherein the data processing system is a mobile
2 phone.

1 27. The method of claim 21, wherein the data processing system is a personal
2 digital assistant.

054014-09459
05 FEB 07 14:04:50

Docket No. 10432RR

- 1 28. A switch comprising:
2 an input for receiving a call for a party;
3 signaling interface for sending a request to a database for call routing
4 information, wherein call routing information from the database includes a calling
5 sequence for a function associated with the party in response to the party previously
6 selecting the function; and
7 a switch fabric, wherein the call is routed from the input through the switch
8 fabric to an output to a destination returned by the database using the calling sequence
9 for the function.
10
- 11 29. The switch of claim 28, wherein the request sent from the signaling interface
12 to the database is sent to a service control point, which provides an interface to the
13 database.
14
- 1 30. A service control point comprising:
2 an input/output interface, wherein request for routing information is received
3 from a requestor at the input/output interface and routing information returned to the
4 requestor;
5 a database containing a plurality of calling sequences for subscribers; and
6 a processing unit connected to the input/output interface and the database,
7 wherein the processing unit has a plurality of modes of operation including:
8 a first mode of operation in which the processing unit monitors for
9 requests for routing information;
10 a second mode of operation, responsive to receiving a request, in
11 which the processing unit identifies routing information for the call;
12 a third mode of operation, responsive to identifying routing
13 information for the call, in which the processing unit determines whether a function
14 has been selected for routing the call;

09400441-00249
66260 "T400460

Docket No. 10432RR

- 15 a fourth mode of operation, responsive to a determination that a
16 function has been selected for routing the call, in which the processing unit sends
17 routing information for the call using a sequence of destinations associated with the
18 function; and
19 a fifth mode of operation, responsive to an absence of a determination
20 that a function has been selected for routing the call, in which the processing unit
21 sends routing information for the call using a call routing schedule based on time.

- 1 31. A communications system for routing a call, the communications system
2 comprising:
3 receiving means for receiving a call;
4 identifying means for identifying call routing information for the call;
5 determining means, responsive to identifying call routing information, for
6 determining whether a function has been selected for routing the call; and
7 routing means, responsive to a determination that a function has been selected
8 for routing the call, for routing the call using a sequence of destinations associated
9 with the function.

- 1 32. The communications system of claim 31 further comprising:
2 determining means, responsive to identifying call routing information, for
3 determining whether a call routing schedule based on time has been selected for
4 routing the call; and
5 routing means, responsive to a determination that a call routing schedule
6 based on time is to be used, for routing the call using a call routing schedule based on
7 time.

- 8
9 33. The communications system of claim 31, further comprising:

Docket No. 10432RR

10 determining means, responsive to a determination that a function has been
11 selected for routing the call, for determining whether a time period for the function
12 has expired;
13 first routing means, responsive to a determination that a time period for the
14 function has expired, for routing the call; and
15 second routing means for routing the call using a call routing schedule based
16 on time instead of using the sequence of destinations associated with the function.

1 34. The communications system of claim 31 further comprising:
2 first monitoring means for monitoring results from routing of the call; and
3 second modifying means for automatically modifying the call routing
4 information based on the results to form modified call routing information, wherein
5 subsequent calls are routed using the modified call routing information.

1 35. The communications system of claim 31, wherein the call is routed to a
2 subscriber associated with the function.

1 36. The communications system of claim 32 further comprising:
2 monitoring means for monitoring results from routing of the call to the
3 subscriber; and
4 modifying means for automatically modifying the call routing information
5 based on the results to form modified call routing information, wherein subsequent
6 calls are routed using the modified call routing information.

1 37. A communications system for call routing a call, the communications system
2 comprising:
3 receiving means for receiving a call to a subscriber;

55 T250 "F4T00450

Docket No. 10432RR

4 routing means for routing the call to the subscriber using call a sequence of
5 destinations associated with the subscriber; and
6 modifying means, responsive to a success of routing the call to the subscriber
7 to a destination within the sequence of destinations, for automatically modifying the
8 sequence of destinations used to call the subscriber, wherein the sequence of
9 destinations is modified to favor destinations with successful call completions.

1 38. The communications system of claim 37 further comprising:
2 modifying means, responsive to detecting initiation of a call by the subscriber
3 from an origin absent from the sequence of destinations, for modifying the sequence
4 of destinations to include the origin as a destination within the sequence of
5 destinations.

1 39. The communications system of claim 38, wherein the origin is included as a
2 destination within the sequence of destinations for a period of time.

1 40. The communications system of claim 38, wherein the calling line identifier is
2 recorded to identify the origin from which the subscriber initiated the call.

1 41. The communications system of claim 37, wherein the sequence of destinations
2 are associated with a time slot.

1 42. The communications system of claim 37, wherein the sequence of destinations
2 are associated with a function.

1 43. A communications system for call routing a call, the communications system
2 comprising:
3 receiving means for receiving a call to a subscriber;

65T269" F4 F00460

Docket No. 10432RR

routing means for routing the call using call routing information associated with the subscriber;

monitoring means for monitoring results from routing of the call to the subscriber; and

modifying means for automatically modifying the call routing information based on the results to form modified call routing information, wherein subsequent calls are routed using the modified call routing information.

44. The communications system of claim 43, wherein the means of routing the call comprises:

first routing means for routing the call to a main destination; and

second routing means, responsive to an absence of an answer at the main destination, for routing the call to an alternate destination.

45. A communications system for call routing a call, the communications system comprising:

receiving means for receiving a call to a subscriber;

identifying means for identifying a time of the call;

first routing means for routing the call to the first destination in an ordered set of destinations for the subscriber based on the time of the call;

second routing means, responsive to an absence of an answer of the call at the first destination, for routing the call to a second destination in the ordered set of destinations;

responsive to an absence of an answer of the call at the second destination, routing the call to a third destination in the ordered set of destinations;

responsive to an answer of the call at the third destination for a number of times, selecting the third alternate destination as the first alternate destination.

0940044-09249
55F260 "T4T00460

Docket No. 10432RR

1 46. The communications system of claim 45, wherein the second alternate
2 destination is selected as the first alternate destination for a temporary period of time.

1 47. The communications system of claim 46, wherein the temporary period of
2 time is a day.

1 48. The communications system of claim 45 further comprising:
2 setting means, responsive to the third destination being answered over a
3 period of time, for setting the third destination as the second destination.

1 49. The communications system of claim 45 further comprising:
2 setting means, responsive to the second destination being answered over a
3 period of time, for setting the second destination as the first destination.

1 50. A in a graphical user interface for use in routing calls in communications
2 system, the communications system comprising:
3 displaying means for displaying a set of icons, wherein each icon within the
4 set of icons is associated with a function used to route calls to a party; and
5 sending means, responsive to a selection of an icon within the set of icons, for
6 sending a message to the communications system to route calls to the party using a
7 calling sequence associated with the function.

1 51. The graphical user interface of claim 50 further comprising:
2 displaying means for displaying a scheduling icon; and
3 sending means, responsive to a selection of the scheduling icon, for sending a
4 message to the communications system to route calls to the party using a time based
5 calling schedule.

0940044-09349
667260-7700460

Docket No. 10432RR

1 52. The graphical user interface of claim 51, wherein the selection of an icon from
2 the set of icons overrides any previous selection of an icon from the set of icons.

1 53. The graphical user interface of claim 52, wherein the selection of the icon
2 overrides a previous selection of the scheduling icon.

1 54. The graphical user interface of claim 50, wherein the data processing system
2 is a personal computer.

1 55. The graphical user interface of claim 50, wherein the data processing system
2 is a mobile phone.

1 56. The graphical user interface of claim 50, wherein the data processing system
2 is a personal digital assistant.

1 57. A computer program product in a computer readable medium for routing a
2 call, the computer program product comprising:
3 first instructions for receiving a call;
4 second instructions for identifying call routing information for the call;
5 third instructions, responsive to identifying call routing information, for
6 determining whether a function has been selected for routing the call; and
7 fourth instructions, responsive to a determination that a function has been
8 selected for routing the call, for routing the call using a sequence of destinations
9 associated with the function.

1 58. A computer program product in a computer readable medium for call routing
2 a call, the computer program product comprising:
3 first instructions for receiving a call to a subscriber;

0940044-093490
65 FEB 04 14 00 46 00

Docket No. 10432RR

second instructions for routing the call to the subscriber using call a sequence of destinations associated with the subscriber; and

third instructions, responsive to a success of routing the call to the subscriber to a destination within the sequence of destinations, for automatically modifying the sequence of destinations used to call the subscriber, wherein the sequence of destinations is modified to favor destinations with successful call completions.

59. A computer program product in a computer readable medium for call routing a call, the computer program product comprising:

first instructions for receiving a call to a subscriber;

second instructions for identifying a time of the call;

third instructions for routing the call to the first destination in an ordered set of destinations for the subscriber based on the time of the call;

fourth instructions, responsive to an absence of an answer of the call at the first destination, for routing the call to a second destination in the ordered set of destinations;

fifth instructions, responsive to an absence of an answer of the call at the second destination, for routing the call to a third destination in the ordered set of destinations;

sixth instructions, responsive to an answer of the call at the third destination for a number of times, for selecting the third alternate destination as the first alternate destination.

60. A computer program product in a computer readable medium for use in routing calls in a communications system, the computer program product comprising:

first instructions for displaying a set of icons, wherein each icon within the set of icons is associated with a function used to route calls to a party; and

09400443 667260 77700460

Docket No. 10432RR

- 5 second instructions, responsive to a selection of an icon within the set of
- 6 icons, for sending a message to the communications system to route calls to the party
- 7 using a calling sequence associated with the function.

0340044-0349
66T260" F4700450

Docket No. 10432RR

ABSTRACT OF THE DISCLOSURE

METHOD AND APPARATUS FOR ADAPTIVE TIME-BASED CALL ROUTING IN A COMMUNICATIONS SYSTEM


5

6940044-09219

A method and apparatus in a communications system for routing a call. A call to a subscriber is received. Call routing information is identified for the subscriber. Responsive to identifying call routing information for the subscriber.

10 A determination is then made as to whether a function has been selected for routing the call. Responsive to a determination that a function has been selected for routing the call, the call is routed using a sequence of destinations associated with the function. Responsive to an absence of a determination that the function has been selected for routing the call, the call is routed using a call routing

15 schedule based on time. Destinations to which calls are actually completed are monitored and the sequence in which destinations are selected and the sequence of destinations may be altered depending on the call completions made to destinations within the sequence of destinations.

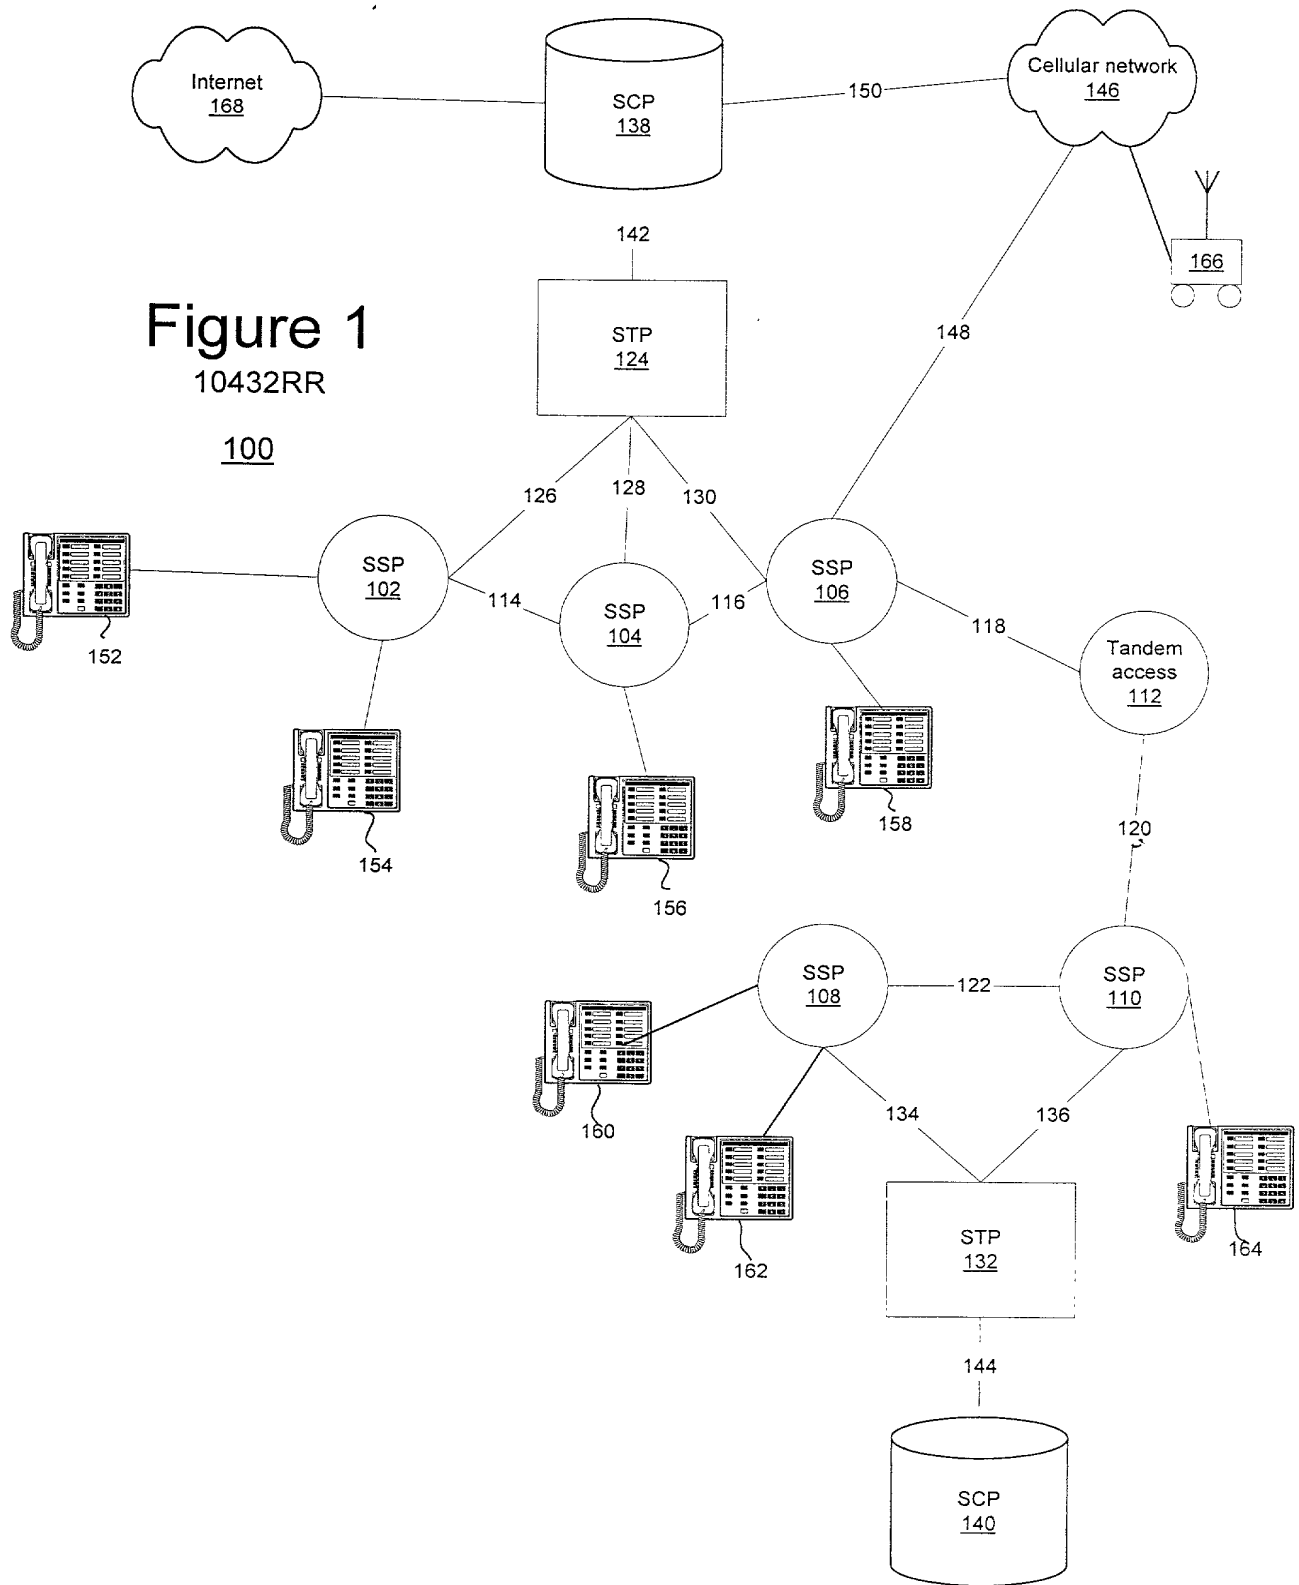

66 FEB 0 14 00 45

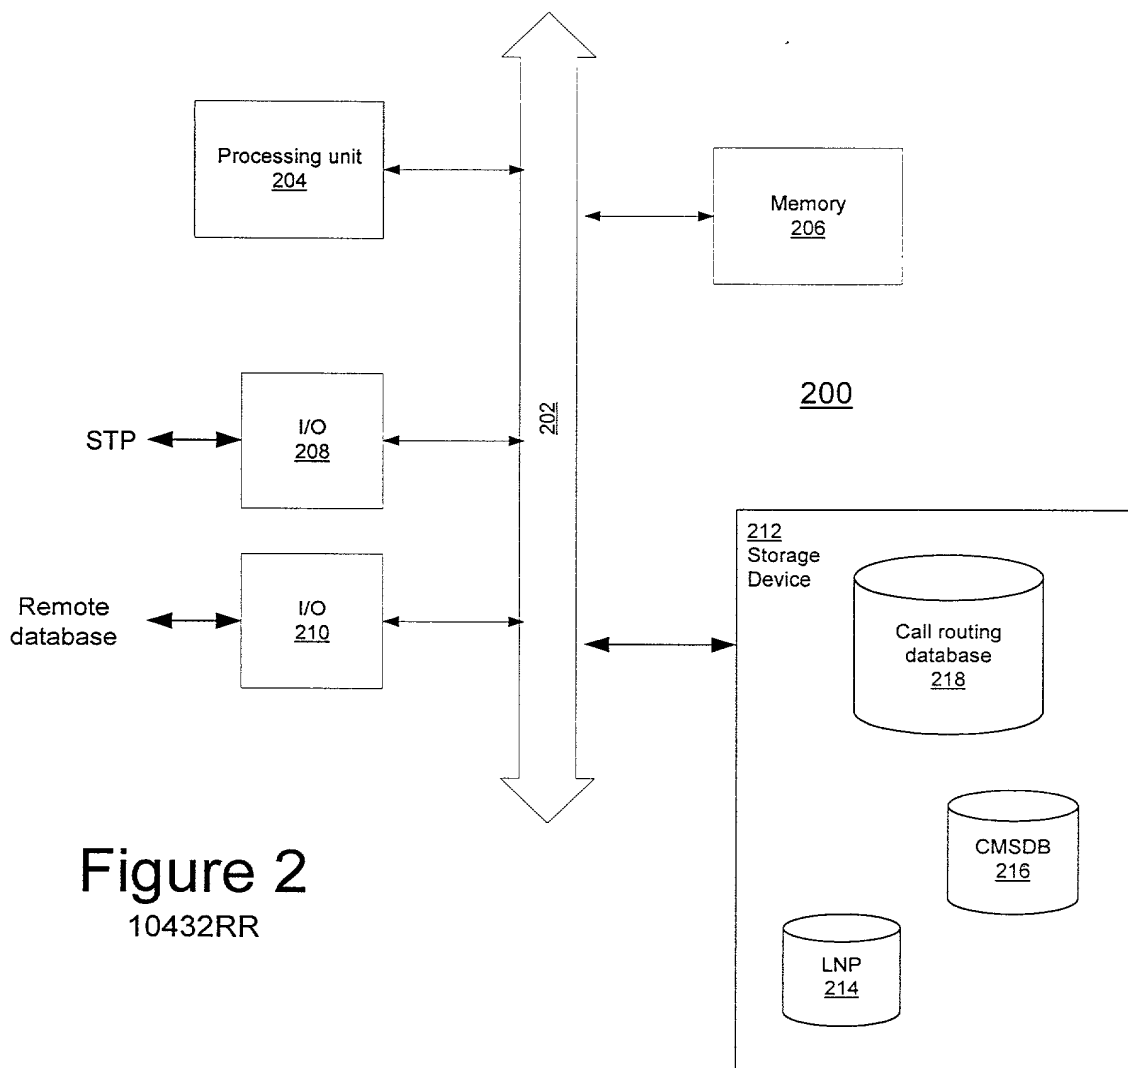


Figure 2
10432RR

Client

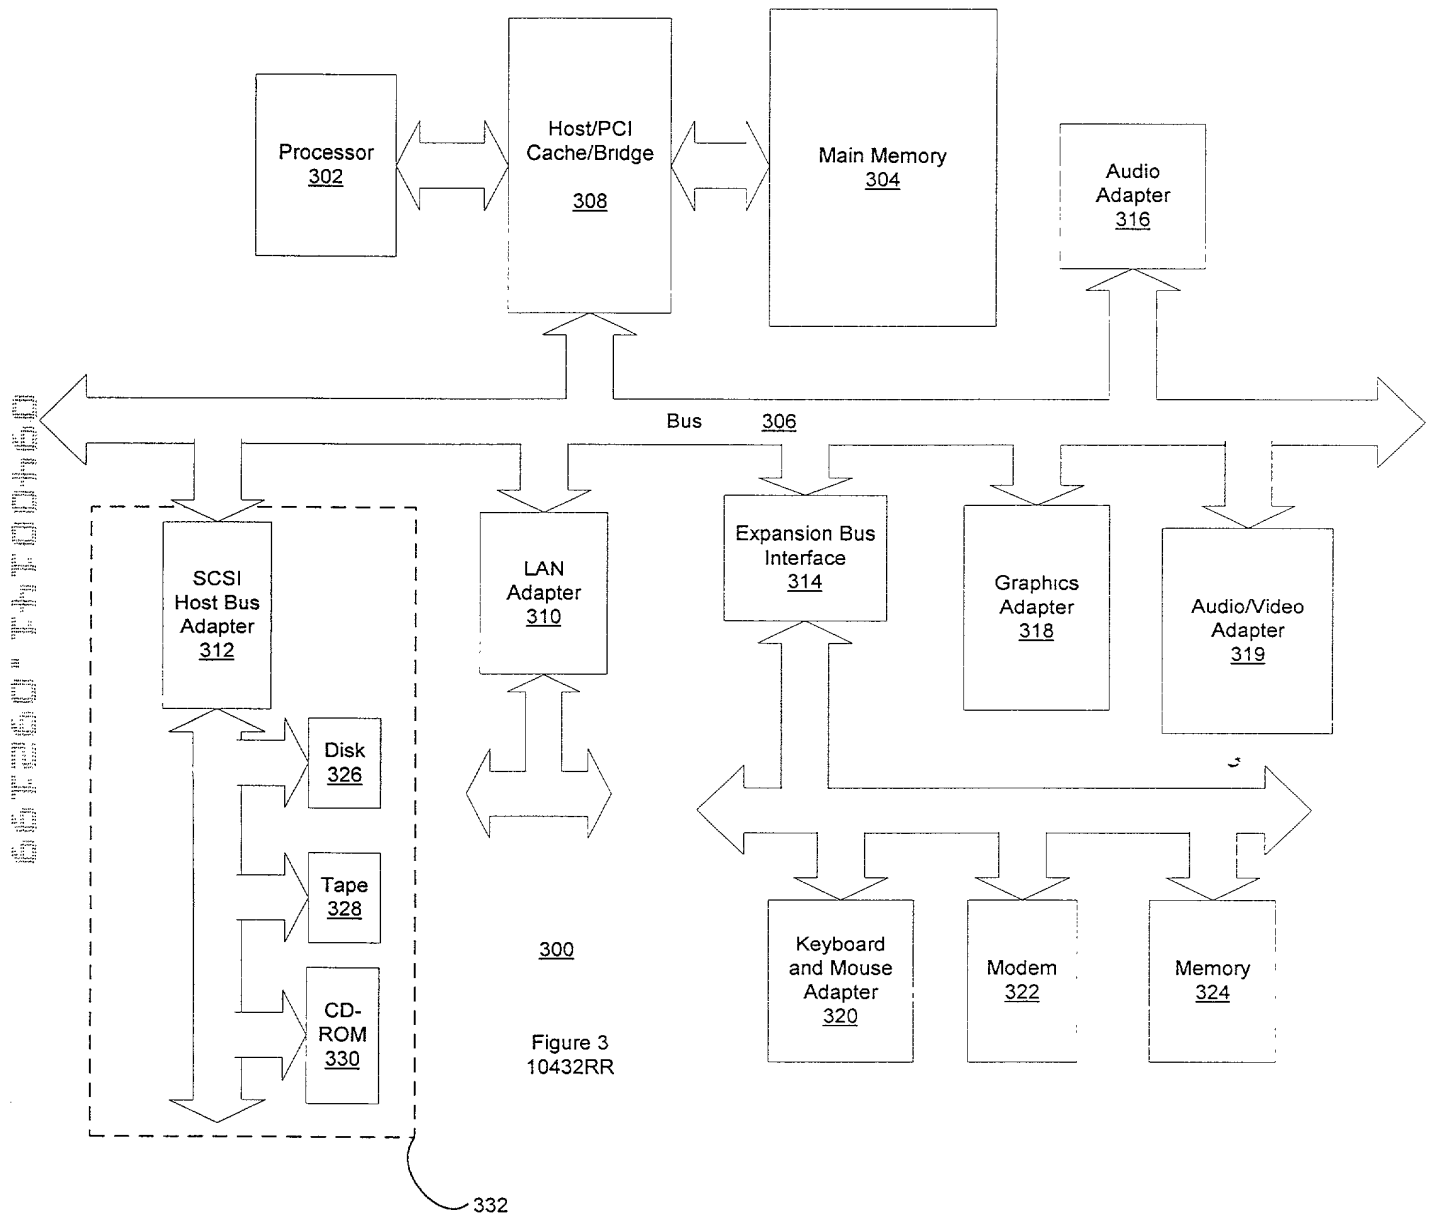


Figure 4
10432RR

400

Figure 4 shows a software interface titled "Caller Connection Service" with a close button (X) in the top right corner. The interface is divided into two main sections: "Schedule" on the left and "Function" on the right. The "Schedule" section (labeled 404) contains a list of time slots from 8:00 to 1:00 in 30-minute increments. To the right of these slots are three activity categories: "In car" (8:00-9:30), "At work" (9:30-12:00), and "At gym" (12:00-1:00). A vertical scrollbar (labeled 408) is positioned to the right of the schedule list. Below the schedule is a "Change" button (labeled 410). The "Function" section (labeled 406) contains a list of activities: "In car", "Going home", "At work", "At gym", "At home", and "Golfing". Below this list are two buttons: "On" (labeled 412) and "Off" (labeled 414).

Figure 5
10432RR

500

502

Figure 5 shows a software interface titled "Caller Connection Service" with a close button (X) in the top right corner. The interface is for adding or deleting a function. On the left, there is a list of functions (labeled 504): "In car", "Going home", "At work", "At gym", "At home", and "Golfing". To the right, there are input fields for: "Function name" (labeled 508) with the value "Going to work"; "Time period" (labeled 510) with the value "1.0"; "Start" time (labeled 512) with the value "08:00 am"; and "End" time (labeled 514) with the value "08:30 am". Below these fields is a "Number" input section (labeled 516) with three rows: row 1 (labeled 518) contains "(976)367-1818", row 2 (labeled 520) is empty, and row 3 (labeled 524) is empty. At the bottom, there are four buttons: "Add" (labeled 506), "Delete" (labeled 526), "OK" (labeled 528), and "Cancel" (labeled 530).

Figure 6

10432RR

600


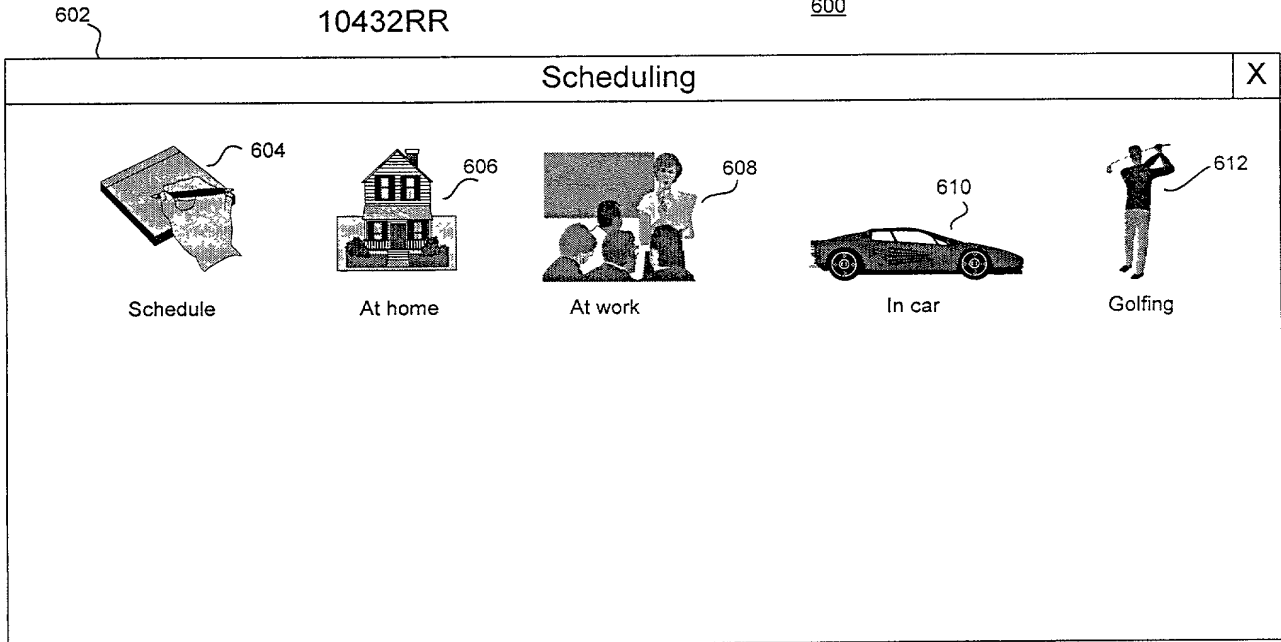


Figure 7


10432RR

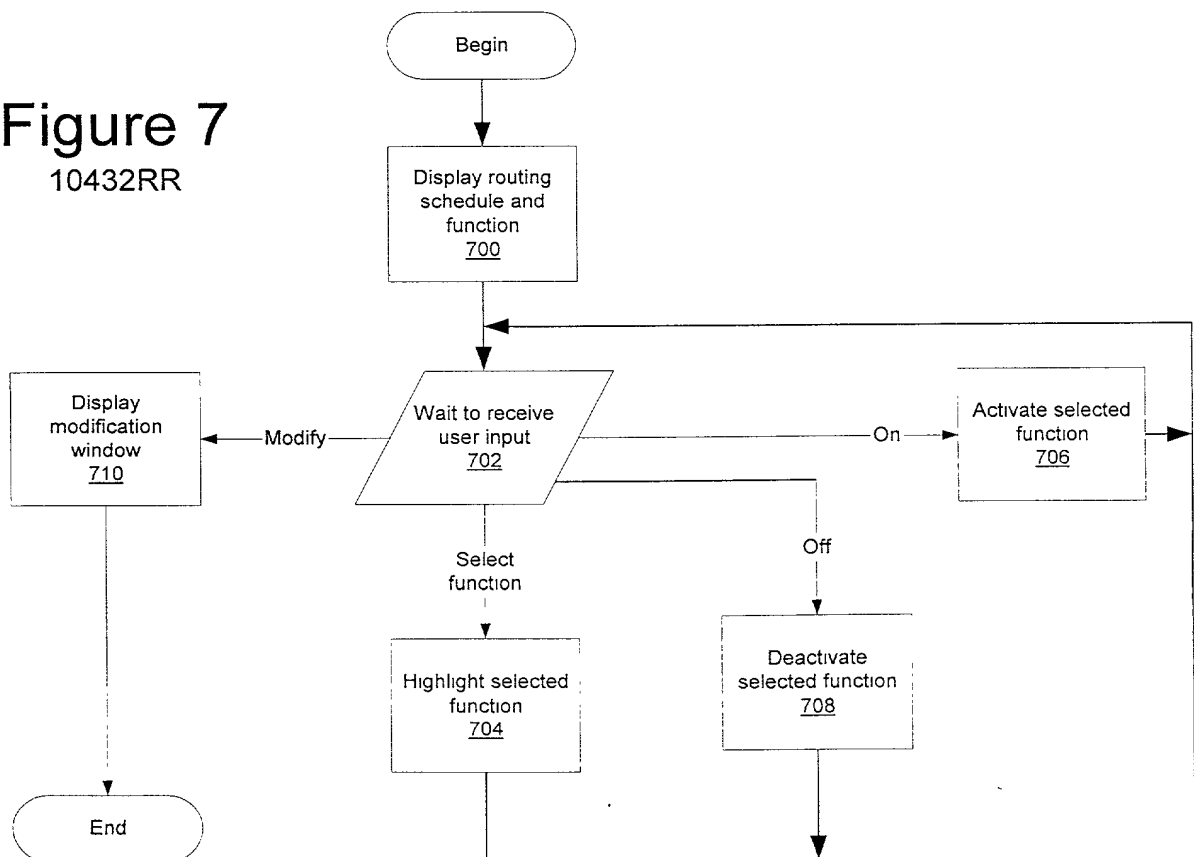

09400441.092499
657260 "T4T00460

Figure 8

10432RR

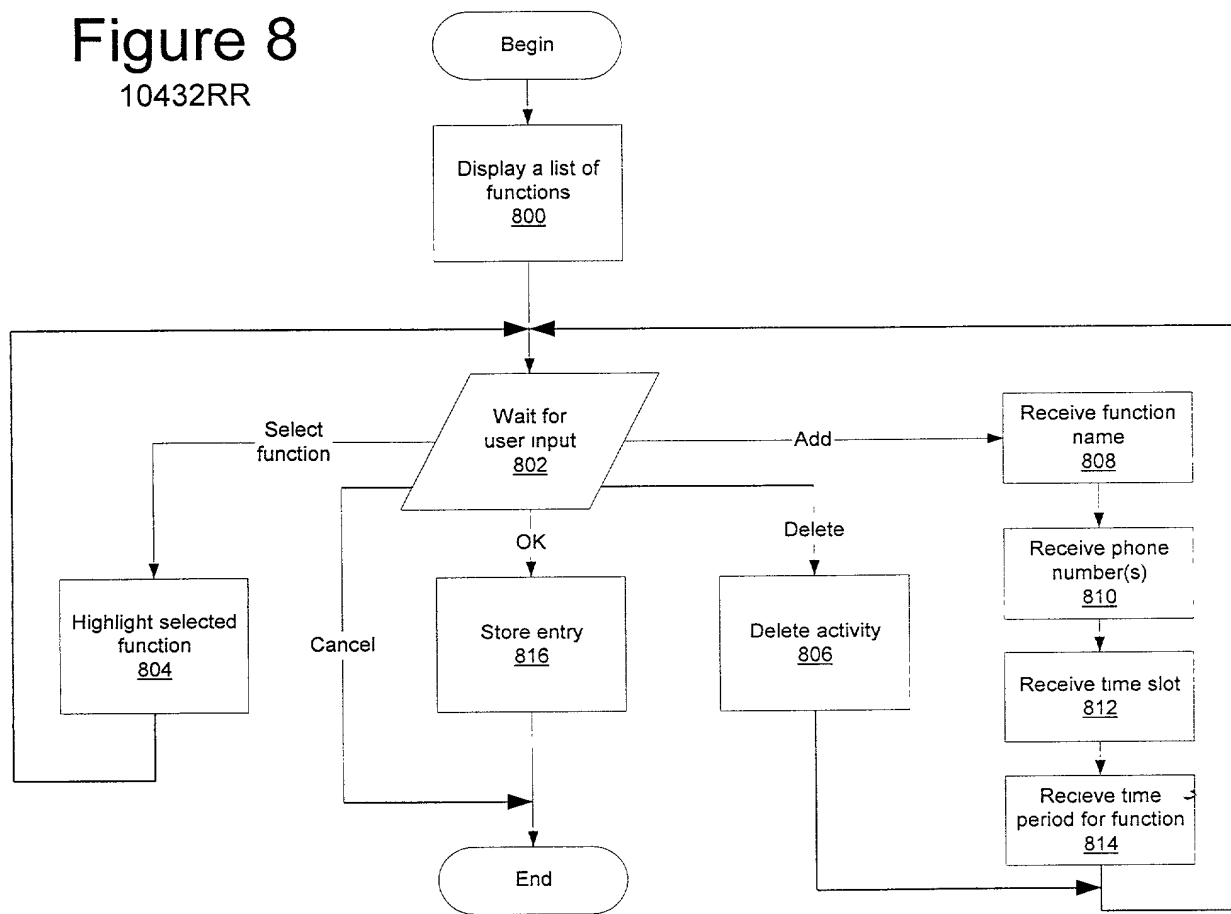

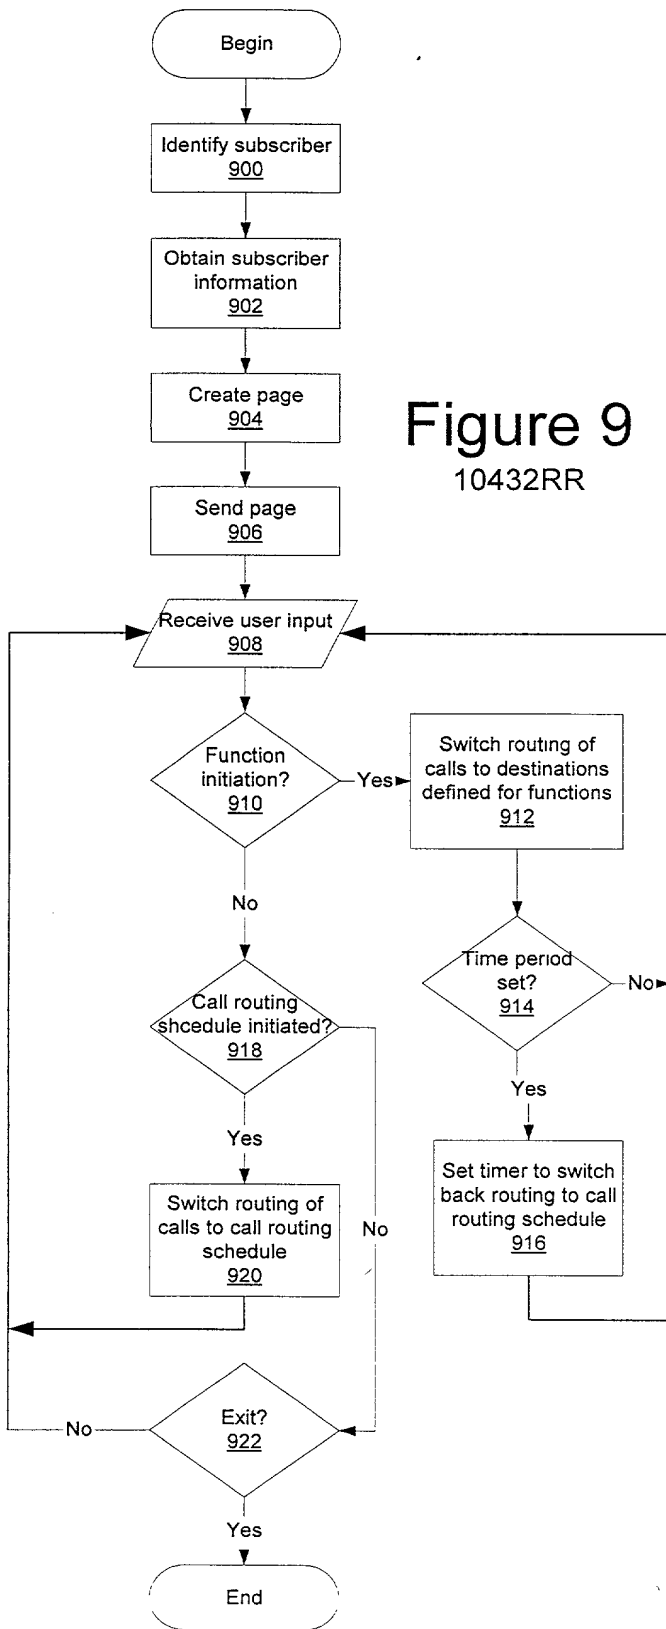


Figure 10
10432RR

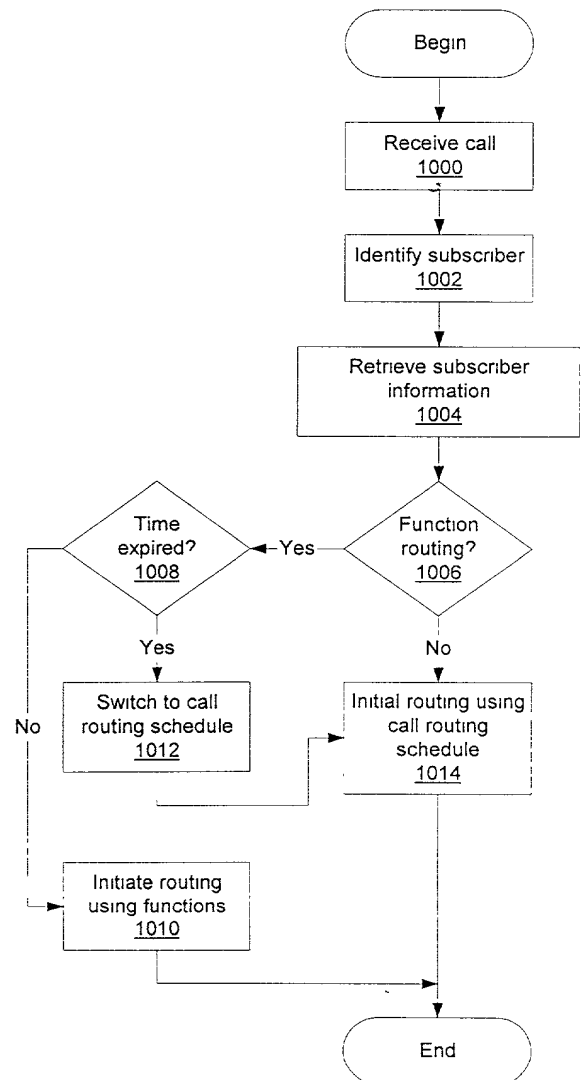


Figure 11
10432RR

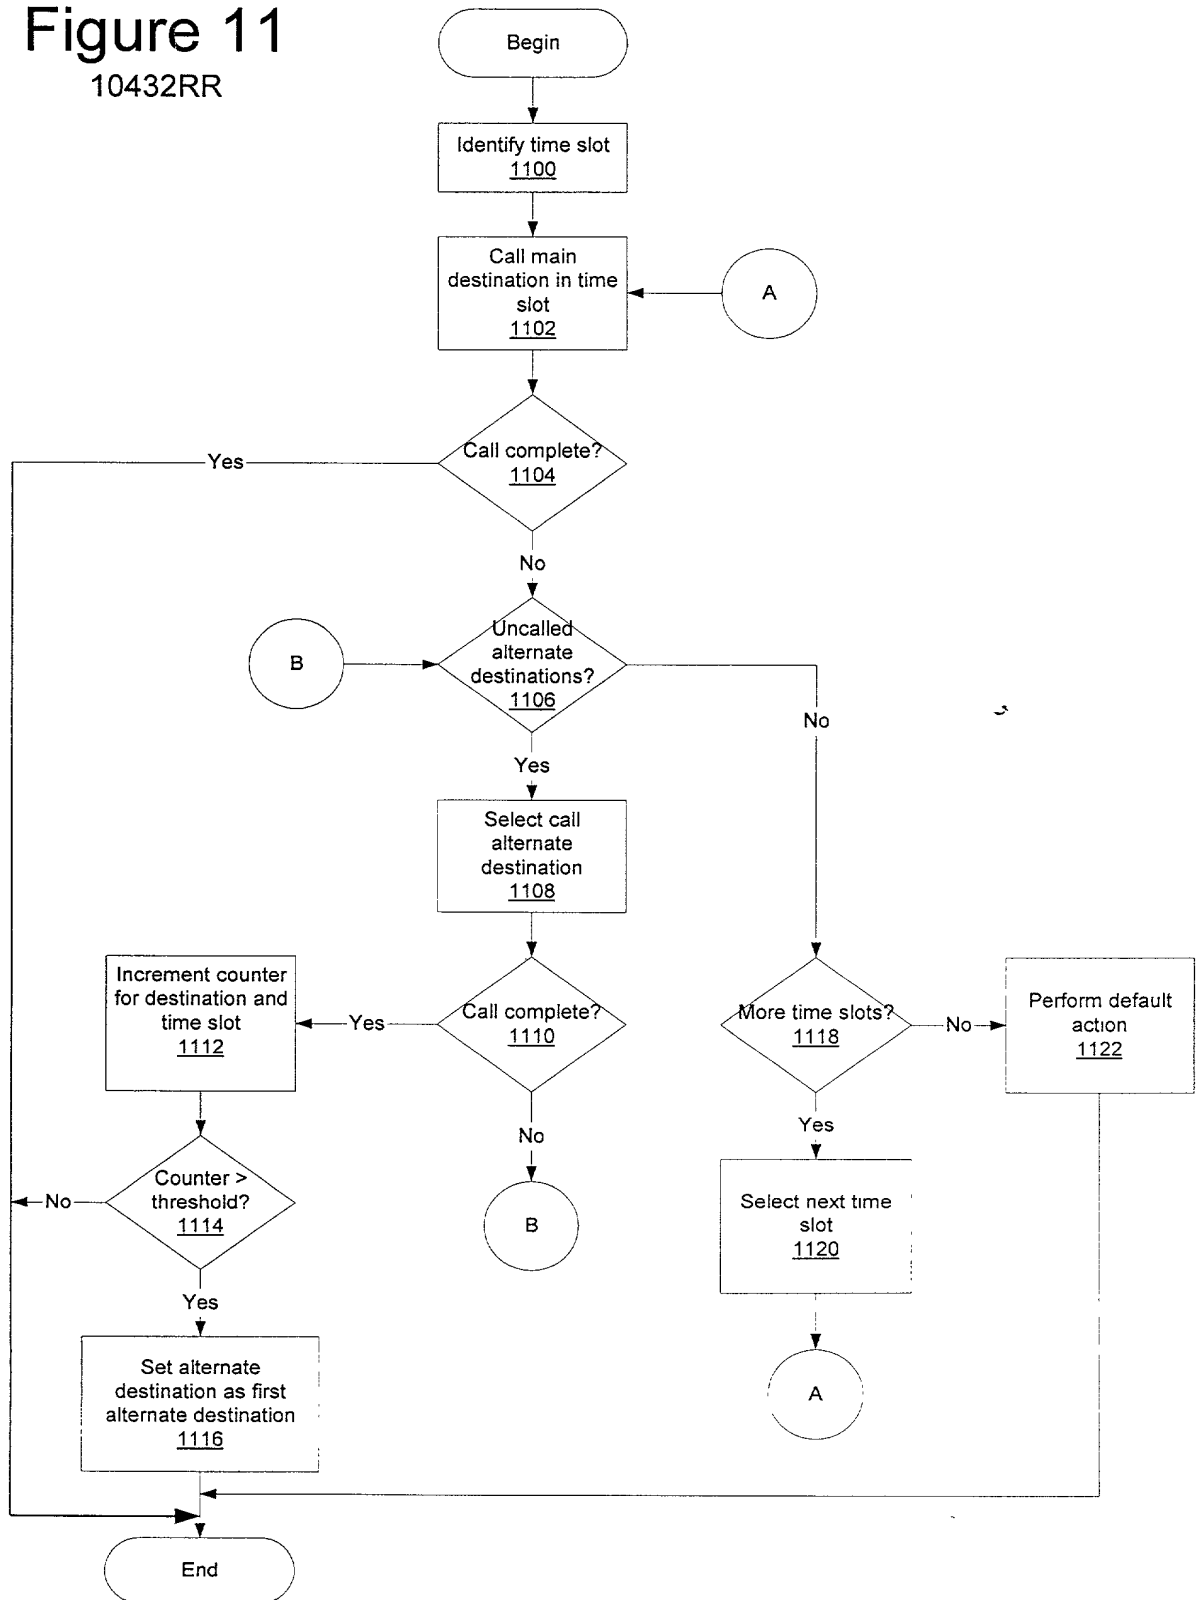
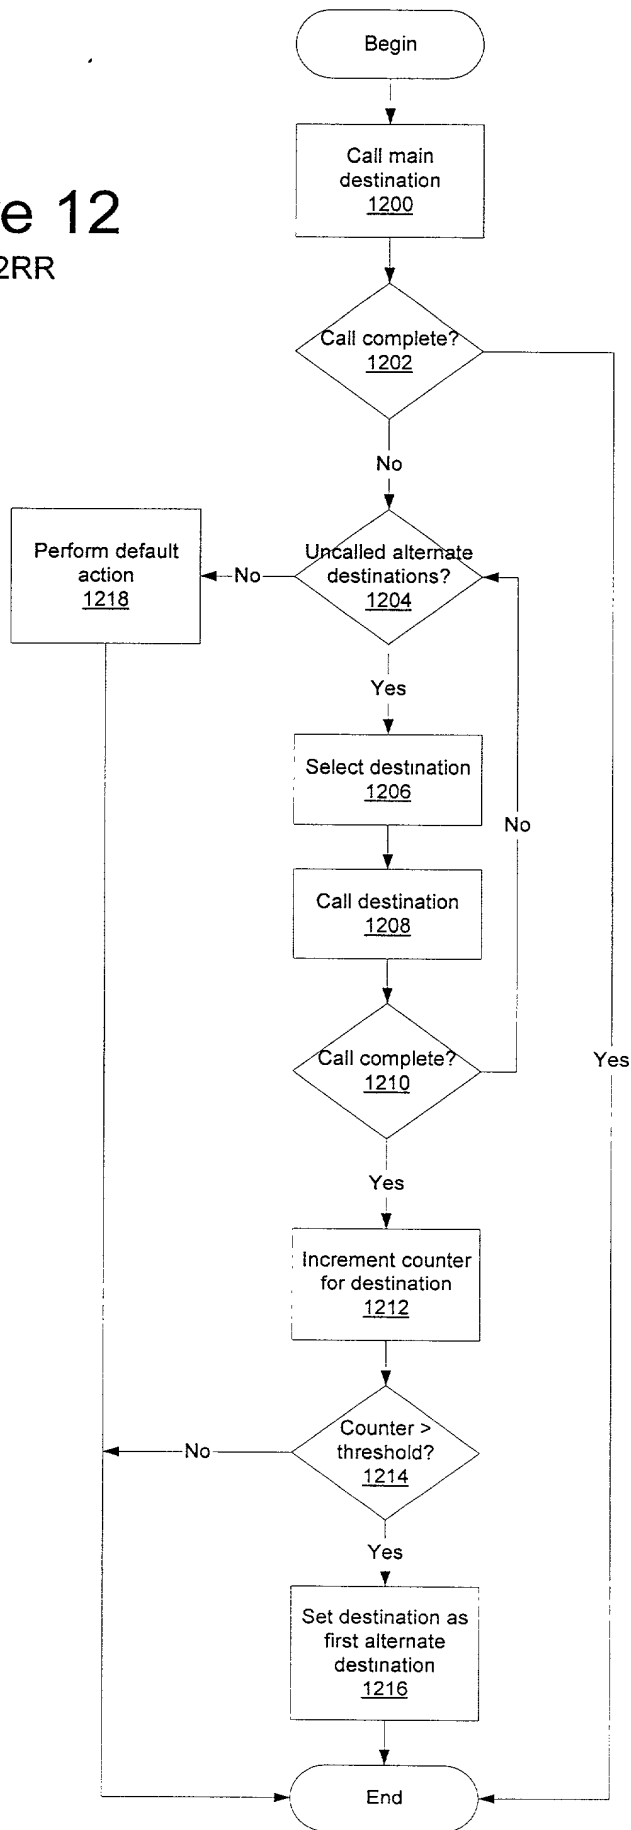


Figure 12
10432RR




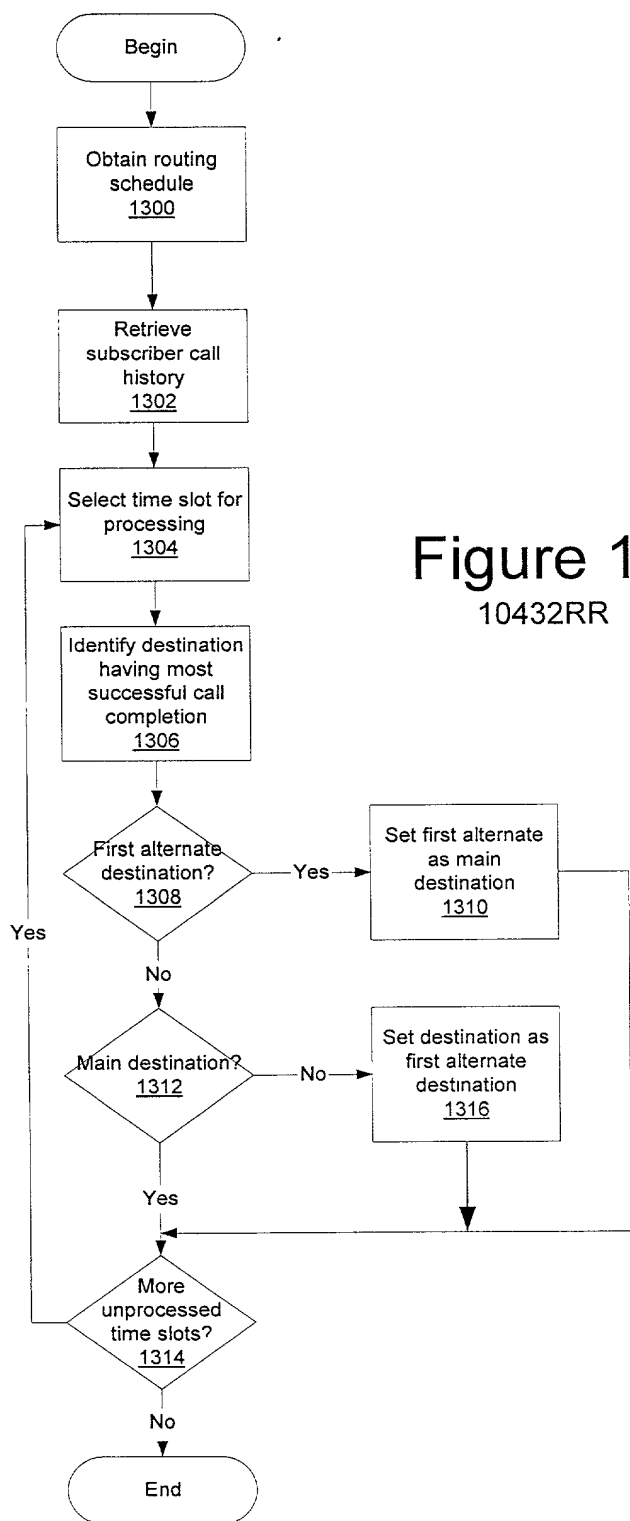


Figure 14
10432RR

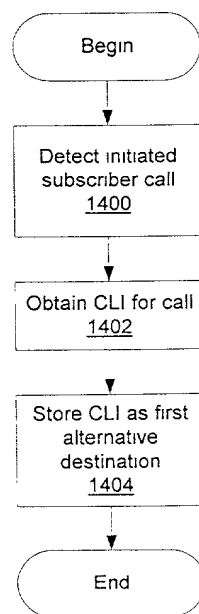

**DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION**

As below named inventor, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name;

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, which is described in the specification of which: (check one)

☒ filed herewith
under Attorney's Docket Number **RR10432**
as Application Serial No. _____

**METHOD AND APPARATUS FOR ADAPTIVE TIME-BASED CALL ROUTING IN A COMMUNICATIONS
SYSTEM**

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 CFR 1.56.

I hereby claim the benefit under Title 35 United States Code section 120 of the provisional application filed under 111b of this title as listed below:

Application No. Unknown, filed on Unknown.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine of imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

667230 " F4T00460


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John D. Crane, Reg. No. 25,231; Kenneth W. Bolvin, Reg. No. 34125;
 Christopher O. Edwards, Reg. No. 36,127; Robert C. Klinger, Reg. No. 34,365;
 James A. Harrison, Reg. No. 40,401; W. Glen Johnson, Reg. No. 39,525; Duke W. Yee, Reg. No. 34,134;
 Rudolph J. Buchel, Reg. No. 43,448, Joseph R. Burwell, Reg. No. 44,468, Stephen R. Loe, Reg. No. 43,757.

Send correspondence to John D. Crane, Nortel Networks Corporation, Patent Department; P.O. Box 833858, Mail Stop 468/05/B10; Richardson, Texas 75083-3858 and direct all telephone calls to John D. Crane, telephone: (972) 695-8442.

=====

(1) FULL NAME OF INVENTOR: Walter Bruce Galt

INVENTOR'S SIGNATURE: 

DATE: 990907


RESIDENCE: 1109 Meadow Lane, Sachse, Texas 75048

COUNTY: Dallas

CITIZENSHIP: Canada

POST OFFICE ADDRESS: Same as above

(2) FULL NAME OF INVENTOR: James Bartoszewicz

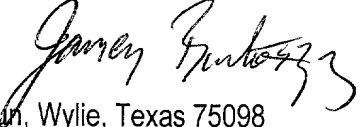INVENTOR'S SIGNATURE: 

DATE:

9-21-99

RESIDENCE: 2054 Quail Run, Wylie, Texas 75098

COUNTY: Collin


CITIZENSHIP: Canada

POST OFFICE ADDRESS: Same as above

657250 "CH00760"

(3) FULL NAME OF INVENTOR: Roy Sells

INVENTOR'S SIGNATURE:



DATE:

31/8/99

RESIDENCE: 6 Phylis Street, Nepean, ~~Ontario~~, Canada, K2J1V2

Ontario

Prep. 31/8/99 .

COUNTY:

CITIZENSHIP: Canada

POST OFFICE ADDRESS: Same as above

667250 74700450